

## Positioning bushings with ramping cone

for indexing plungers


### SPECIFICATION

Steel



- hardened
- blackened

### INFORMATION


Positioning bushings with ramping cone GN 412.3 are used in connection with bolts of indexing plungers. The threads are adapted to the mounting blocks GN 412.1 (see page 814) and GN 612.1 (see page 815).

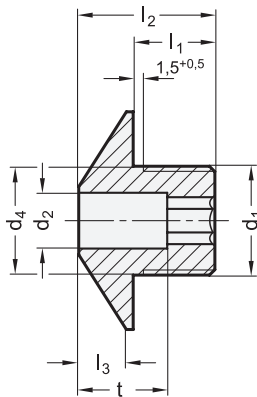

Assembly examples



Application example

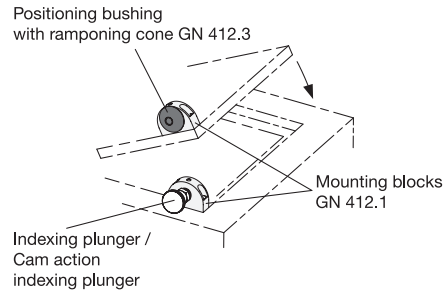

### GN 412.3

Description	d1	d2 +0.1	d3	d4 -0.05	l1	l2	l3	A/F	t	
GN 412.3-M12x1,5-B4,2	M 12 x 1,5	B 4,2	24	12	10	16	5	4	11	17
GN 412.3-M12x1,5-B5,2	M 12 x 1,5	B 5,2	24	12	10	16	5	4	11	16
GN 412.3-M12x1,5-B6,2	M 12 x 1,5	B 6,2	24	12	10	16	5	4	11	15
GN 412.3-M16x1,5-B8,2	M 16 x 1,5	B 8,2	32	16	12	20	7	6	13	36
GN 412.3-M16x1,5-B10,2	M 16 x 1,5	B 10,2	32	16	12	20	7	6	13	33
GN 412.3-M16x1,5-B12,2	M 16 x 1,5	B 12,2	32	16	12	20	7	6	13	31

