



SR Series — SOLENOID VALVE

Operating specification and Order expression

CHELIC PNEUMATIC

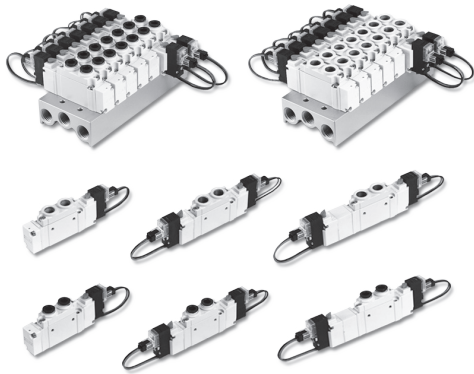

Internal structure

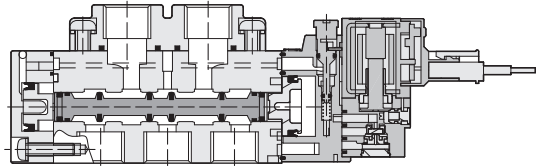

Specification

Item	Model	SR300	SR500	SR700	SR900		
Fluid		Air					
Pressure range	kgf/cm ² (Kpa)	1.5 ~ 7 (150 ~ 700)					
Operating ambient temperature range	°C	0 ~ 50					
Operating method		Pilot operated					
Number of position ports		5 ports 2 positions	5 ports 3 positions	5 ports 2 positions	5 ports 3 positions	5 ports 2 positions	5 ports 3 positions
Valve functions		Normal closed					
Orifice	mm ² (CV)	3.6 (0.2)	9 (0.5)	16.2 (0.9)	30.6 (1.7)		
Manual button		Push and lock					
Connection port		M5 · Rc 1/8 · Ø4 · Ø6 · Ø8			Rc1/8 · Rc 1/4 · Rc 3/8 · Ø6 · Ø8 · Ø10 · Ø12		
Lubrication		Lubrication free type					

How to order

