




SPX-50 35.0 B (SPX100B00B10AA)

3 PH - 4 poles - 1500 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
316	158	4.000	220-240/380-415	2,4	Δ 8,65 Y 5	0,69	5,5

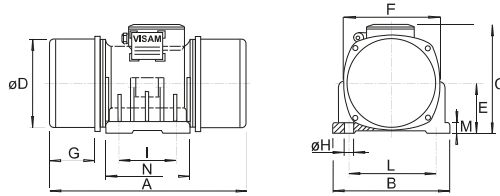

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app. Contact us for more information.

OVERALL DIMENSIONS (mm)													
Weight [Kg]	H	I	L	Holes number	A	B	C	E	F	G	N	P	Q
118	25	165	270	4	568	330	270	150	285	104	360	150	90

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	No	M24	25 x 44 mm	696	/	/

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 2311		8362	16331	>100000

CERTIFICATION	
Atex II 3D Ex tc IIIc T140°C IP66	