



SRM-15.6J

15.6" Sunlight Readable LCD Monitor

- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- 1,000 nits Brightness
- LED Backlights
- High Shock & Vibration Resistance
- Lockable On-Screen Display Controls
- Dim-to-Black Via Front Pushbuttons
- 3 Year Warranty

The SRM-15.6J Sunlight Readable monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRM-15.6J Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising, material handling (cranes) and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.


Specifications

MODEL	SRM-15.6J
LCD Panel	15.6" Color TFT LCD Monitor
Resolution	1366 x 768 (WXGA)
Backlights	LED
Viewable Area	13.55" (W) x 7.61" (H) (344.2 x 193.5 mm)
Pixel Pitch	0.252mm x 0.252mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	500:1
Viewing Angle	170° (H) x 160° (V)
Response Time	8 msec Trf
Control	OSD (On-Screen Display) via Front Panel Pushbuttons
Video Inputs	DVI, BNC (VGA and HDMI Via Supplied Adapter Cables)
In / Output Impedance	75Ω / Auto Terminating Output
Power Requirement	11-28 VDC
Power Consumption	25 Watts
Enclosure	Powder-Coated Steel
Mounting	Via 75x75mm Rear VESA Hole Pattern
Operating Temperature	-22° to 185° F / -30° to 85° C
Humidity	5-90% RH
Shock	50 G (20 msec, 1/2 sine)
Vibration	1.5G RMS 10-200 HZ
Dimensions	15.0" (W) x 10.2" (H) x 2.0" (D) / 381.0 (W) x 259.08 (H) x 50.80 (D) mm
Weight	7.3 lbs. / 3.31 kg

SRM-15.6J

15.6" Sunlight Readable LCD Monitor

Dimensions

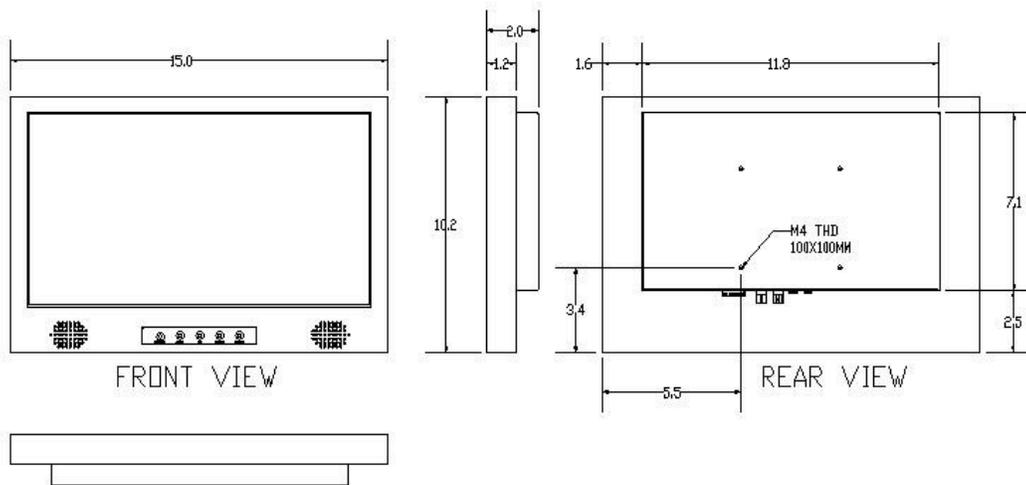

Standard Accessories:

- DVI Cable
- DVI-to-HDMI Adapter Cable
- DVI-to-VGA Adapter
- VGA Cable

Available Options:

- 90-240 VAC Power Supply
- Protective Anti-Reflective Glass
- Speakers
- Tabletop Base
- Wall Mount Bracket
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label